

(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 829 354 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**24.07.2002 Bulletin 2002/30**

(51) Int Cl.7: **B41J 2/045, B41J 2/165**

(21) Application number: **97906842.6**

(86) International application number:  
**PCT/JP97/00697**

(22) Date of filing: **06.03.1997**

(87) International publication number:  
**WO 97/32728 (12.09.1997 Gazette 1997/39)**

(54) **INK JET PRINTER AND METHOD FOR DRIVING THE SAME**

**TINTENSTRAHLDRUCKKOPF UND STEUERVERFAHREN DAFÜR**

**IMPRIMANTE A JETS D'ENCRE ET PROCEDE D'ACTIONNEMENT DE CETTE IMPRIMANTE**

(84) Designated Contracting States:  
**DE FR GB IT**

(30) Priority: **07.03.1996 JP 5063196**  
**07.03.1996 JP 5063296**

(43) Date of publication of application:  
**18.03.1998 Bulletin 1998/12**

(73) Proprietor: **SEIKO EPSON CORPORATION**  
**Shinjuku-ku, Tokyo 163-0811 (JP)**

(72) Inventors:  
• **NAKAZAWA, Chiyoshige**  
**Suwa-shi, Nagano-ken 392 (JP)**

• **MINOWA, Masahiro**  
**Suwa-shi, Nagano-ken 392 (JP)**  
• **KOBAYASHI, Naoki**  
**Suwa-shi, Nagano-ken 392 (JP)**

(74) Representative: **Hoffmann, Eckart, Dipl.-Ing.**  
**Patentanwalt,**  
**Bahnhofstrasse 103**  
**82166 Gräfelfing (DE)**

(56) References cited:  
**EP-A- 0 634 272** **GB-A- 2 272 185**  
**JP-A- 2 217 256** **JP-A- 3 234 650**  
**JP-A- 7 137 252** **JP-A- 7 246 703**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 829 354 B1**

## Description

[0001] The present invention relates to an ink jet printer for recording text, symbols, images, and other printing data by ejecting minute ink drops, and relates particularly to a control method for an ink jet printer whereby clogging of nozzles by ink that has become more viscous in the area of the nozzles is prevented.

[0002] Various methods of driving the nozzles of an ink jet recording device to eject recording ink from the nozzles have been disclosed and are today used on such ink jet recording devices. These methods include using a piezoelectric element as the driving means as taught in JP-B-2-51734/1990; ejecting ink using a heating element for heating the ink as disclosed in JP-B-61-59911/1986; and ejecting ink from the nozzles by using an electrostatic actuator to vibrate a diaphragm by means of electrostatic force.

[0003] Generally speaking, such ink jet printers buffer an image signal to a RAM or other storage device, and then selectively drive the appropriate pressure generating means, i.e., piezoelectric element, heating element, or electrostatic actuator, disposed near each nozzle to eject ink and print on a recording medium based on the buffered image signal data.

[0004] A problem common to each of these ink jet printer designs is that when ink is not ejected from the nozzles for a certain period of time, ink around the nozzles tends to dry due to evaporation of moisture or other ink solvent. This results in increased viscosity in ink near the nozzles.

[0005] When the viscosity of ink near the nozzles thus rises, the nozzles tend to become clogged, thus completely preventing ink from being ejected during printing, or preventing ink from being ejected at the normal dot size and speed. This increased ink viscosity can also slow the refill rate of ink to the nozzles, thereby preventing the nozzles from being refilled at the same rate ink is ejected. Air can become mixed with the ink when this happens, thus preventing ink drops from being ejected.

[0006] To avoid the above problems, many ink jet printers cover the nozzles with a cap when printing (recording) is not in progress. This prevents the nozzles from drying, and prevents an increase in the viscosity of ink around the nozzles.

[0007] In addition to such methods of covering the nozzles with a cap, many methods of preventing ink blockage near the nozzles by regularly ejecting microdrops of ink from all nozzles separately from the printing process have also been proposed. These methods also help maintain and recover printing performance.

[0008] Exemplary of these methods is the recovery process method disclosed in JP-B-6-39163/1994 for reliably expelling high viscosity ink without introducing air to the nozzles even when the viscosity of ink around the nozzles rises. This is accomplished by setting the ink jet head drive frequency used during the recovery ejection operation lower than the highest drive frequency used

when recording text or images.

[0009] Methods other than expelling high viscosity ink to recover the nozzles have also been disclosed. Exemplary of these is the method disclosed in JP-A-56-129177/1981 for preventing nozzle clogging due to dry ink around the nozzles by using an oscillator to vibrate the ink at the resonance frequency of the ink jet head and mobilize the ink when recording is not in progress.

[0010] The various methods described above, however, leave the following problems unresolved.

(1) Each of the above methods requires two drive frequencies, a recording frequency for ejecting ink drops during recording, and a nozzle recovery frequency for driving a pressure generating means to prevent clogging, and these two frequencies must be used appropriately.

The drive circuit and control thereof are thus complex.

(2) When an ink jet head having high viscosity ink around the nozzles is driven at a frequency lower than a drive frequency used during normal recording as taught in JP-B-6-39163/1994, it can be difficult to expel high viscosity ink in ink jet heads in which the pressure generated by the pressure generating means is itself low. This method therefore cannot be used with all types of ink jet printers.

(3) The viscosity also rises throughout the upstream ink path leading to the nozzles, and not just around the nozzles, after a certain amount of time has passed even if the ink is mobilized by vibrating the ink at the resonance frequency of the ink jet head when recording is not in progress as taught in JP-A-56-129177/1981. Ink ejection thus eventually becomes impossible. As a result, this method cannot be used for applications in which normal ink jet recording is not performed for a certain period of time, i.e., a no-ejection condition continues for a certain period of time.

(4) When recording is not in progress the ink viscosity increases around all of the nozzles.

During recording, however, fresh ink is constantly supplied to frequently used nozzles and the ink viscosity at those nozzles is therefore low while the ink viscosity around less frequently used nozzles increases. This means that both high viscosity and low viscosity nozzles can be found in the same ink jet head during recording. While the less frequently used nozzles could be maintained by frequent maintenance (recovery) ejection therefrom, this necessitates analyzing the recording data to determine the no-ejection time for each nozzle. This, however, is difficult to accomplish for each of the more than one-hundred or so nozzles on an ink jet

head. A method whereby all nozzles are regularly operated for nozzle recovery is therefore used on the assumption that none of the nozzles has ejected once since the last operation. This method, however, results in the wasteful consumption of ink by frequently used nozzles, nozzles for which such nozzle recovery ejection is not necessary.

[0011] The closest prior art document EP-A-0 574 016 discloses an ink jet printer and a method of driving an ink jet type line printer comprising a plurality of nozzles for ejecting ink drops, a corresponding plurality of piezoelectric pressure generating elements for pressurizing ink in the respective nozzles, and means for transporting said nozzles relative to a printing medium for printing on the printing medium in accordance with print data, said method comprising generating a reference signal of a single frequency, applying to each of said pressure generating means synchronized to the reference signal either a first type electric pulse of an amplitude enabling ink drop ejection, or a second type electric pulse of an amplitude lower than that of the first type electric pulse for mobilizing ink inside a nozzle. During printing the first type pulse is applied to each pressure generating element associated with a nozzle that is to print a dot, while the second type pulse is applied to each pressure generating element associated with a nozzle that is not to print a dot. Ink near the nozzle associated with pressure generating elements energized by the second type pulse is mobilized but not ejected thereby retarding the nozzle clogging. While the printer is not used at all for an extended period of time, the second type pulse is applied to all pressure generating elements. Though this cannot prevent nozzle clogging it extends the allowable time of non-use after which any nozzle clogging may still be removed by what is called a "flushing operation" in the document. Even in that case, if the period of non-use of the printer exceeds a certain time, nozzle clogging occurs to such an extent that a "cleaning operation" rather than a flushing operation is required to recover the nozzles. The document describes that the time required for such cleaning operation can be reduced by applying the second type pulse to the pressure generating elements for a given period of time before the cleaning operation is performed. Thus, in this prior art, a series of second type pulses followed by a cleaning operation is performed to recover the nozzles from nozzle clogging rather than to prevent the nozzle clogging.

[0012] An object of the present invention is therefore to provide an ink jet printer whereby nozzle clogging can be reliably prevented by means of a simple method and construction, thereby resolving the above problems.

[0013] A further object of the present invention is to reduce the amount of ink consumed by the recovery process for preventing nozzle clogging.

[0014] These objects are achieved with a method as claimed in claim 1 and an ink jet printer as claimed in

claim 7.

[0015] In accordance with the present invention, the second type electric pulse is applied a plurality of times to a pressure generating means, and the first type electric pulse is then applied. This sequence is repeated one or more times. Applying the second type electric pulse mobilizes ink in which there are localized increases in viscosity, notably near the nozzle. Mobilization thus lowers the viscosity of ink near the nozzle, and the first type electric pulse is then applied to eject an ink drop from the nozzle. The invention enables reliable ink ejection and nozzle recovery even in ink jet printers in which the pressure generated by the pressure generating means is low. Since the recovery process is executed in response to a print command, e.g., after receipt of a print command and before printing or once every print line, not only can nozzle clogging be prevented but also a uniform print quality ensured. The nozzle recovery process can also be performed at a regular interval during printer standby states, or appropriately according to conditions.

[0016] Preferably, the second type electric pulse is also used during a printing process. Specifically, the first type electric pulse is applied selectively to pressure generating means according to the printing content to eject ink drops from one or more nozzles, and the second type electric pulse is applied to those nozzles to which the first type electric pulse is not applied. This suppresses an increase in the viscosity of ink in less frequently used nozzles. More specifically, this reduces differences in ink viscosity resulting from differences in the frequency of nozzle use in the same ink jet head. It is therefore possible to increase the interval between nozzle recovery ejection operations, and thereby decrease wasteful ink consumption from the nozzle recovery process. This method is particularly effective in color ink jet printers where differences in the frequency of nozzle use occur easily.

[0017] The method of the present invention can be used in any ink jet printer using pressure generating means whereby ink drops can be ejected, or ink inside a nozzle can be mobilized without ejecting an ink drop, by changing the amplitude of the drive pulse applied to a pressure generating means.

[0018] For example, the present invention can be used when the pressure generating means is an electrostatic actuator comprising a diaphragm that is displaced by electrostatic force as taught in JP-A-7-81088/1995. As described in this document, a residual charge accumulates in the diaphragm when a pressure generating means of this type is driven for a prescribed time, and the relative displacement of the diaphragm tends to decrease. By applying a second type electric pulse of a polarity different from that of the first type electric pulse, however, an increase in viscosity near the nozzle can be prevented, and the residual charge can be simultaneously removed.

[0019] An ink jet printer having a plurality of nozzles

for ejecting ink drops, pressure generating means disposed corresponding to said nozzles for pressurizing ink in said nozzles, and means for transporting said nozzles relative to a printing medium for printing, comprises according to a further embodiment of the present invention a common terminal connected in common to each of said pressure generating means, a plurality of segment terminals connected individually to said pressure generating means, first drive means for applying a first type electric pulse to the common terminal, and second drive means for applying a second type electric pulse of an amplitude different from the amplitude of the first type electric pulse to a segment terminal. The difference between the first type electric pulse applied to the common electrode, and the second type electric pulse applied to the segment electrode, is thus applied to a pressure generating element. Each electric pulse is applied separately by the respective drive means to a pressure generating element. As result, electric pulses of two different amplitudes can be selectively applied to a pressure generating element without complicated control.

[0020] Preferred embodiments of the invention will be explained in detail below with reference to the drawings.

- Fig. 1 is a block diagram of an ink jet printer according to a preferred embodiment of the present invention.
- Fig. 2 is a birds'-eye view of an exemplary printing unit 90 shown in Fig. 1.
- Fig. 3 is a cross sectional view of an exemplary ink jet head 30 shown in Fig. 1.
- Fig. 4 is a plan view of the ink jet head 30 shown in Fig. 3.
- Fig. 5 is a partial cross sectional view used to describe the operation of the ink jet head 30 shown in Fig. 3, Fig. 5 (a) showing the standby state, (b) the ink intake state, and (c) the ink compression state.
- Fig. 6 is a circuit diagram of one example of the selection means 150 shown in Fig. 1.
- Fig. 7 is a circuit diagram of one example of the driver 190 shown in Fig. 1.
- Fig. 8 is a logic table showing the relationship between input signals and output signals of the driver 190 shown in Fig. 7.
- Fig. 9 is a timing chart of ink jet head operation during printing, and is used to describe an ink jet printer drive method according to a preferred embodiment of the present invention.

Fig. 10 is a flow chart used to describe an alternative embodiment of an ink jet printer drive method according to the present invention.

5 Fig. 11 is a timing chart showing various signals used in the ink jet printer drive method shown in Fig. 10.

Fig. 12 is a timing chart of ink jet head operation during a nozzle recovery process according to an alternative embodiment of an ink jet printer drive method according to the present invention.

10 Fig. 13 is a timing chart of ink jet head operation during a nozzle recovery process in which a reverse polarity drive pulse is applied according to an alternative embodiment of an ink jet printer drive method according to the present invention.

[0021] The preferred embodiment of an ink jet printer according to the present invention is described below with reference to the accompanying figures.

25 [0022] Fig. 1 is a block diagram of an ink jet printer according to a preferred embodiment of the present invention, and Fig. 2 is a birds'-eye view of an exemplary printing unit 90 shown in Fig. 1.

[0023] As shown in Fig. 1, an ink jet printer according to the present invention comprises a printing unit 90 and a control unit 100 for controlling the printing unit 90 based on an image signal transmitted from a host.

[0024] The printing unit 90 is comprised as shown in Fig. 2 and described below. The recording paper 105 is transported by a platen 300, and ink is supplied to the ink jet head 30 through an ink supply tube 306 from an ink tank 301 in which ink is stored.

[0025] The ink jet head 301 comprises pressure generating means such as piezoelectric elements, heating elements, or electrostatic actuators, and is transported on a carriage 302. The carriage 302 is driven by a motor 80 (Fig. 1), and moves in a direction perpendicular to the transportation direction of the recording paper 105. A pump 303 is used for an ink recovery process whereby ink from inside the ink jet head 30 is recovered to the waste ink tank 305 by pumping the ink through a cap 304 located at the recovery ejection R position and waste ink recovery tube 308. It should be noted that this ink recovery process by means of the pump 303 is used on ink jet heads which can no longer be refreshed by a recovery ejection process. This can occur when, for example, the ink jet printer has not printed for an extended period of time, or when air becomes trapped in a nozzle.

[0026] The ink jet head 30 mounted on carriage 302 travels between printing area P, which has approximately the same width as platen 300, and the front of cap 304 (recovery ejection position R). The ink jet head 30 ejects ink for recording when traveling through printing

area P; the recovery ejection operation for preventing nozzle clogging is performed at recovery ejection position R.

[0027] The cap 304 can advance towards ink jet head 30 and retract from ink jet head 30. When ink is recovered from ink jet head 30, the cap 304 advances to cover the nozzles of the ink jet head 30, and ink is ejected from all nozzles of the ink jet head 30 into the cap 304. Recovery ejection can be accomplished without covering the nozzles with cap 304 when printing is in progress, and can be accomplished with the nozzles capped when the ink jet printer is in a standby state.

[0028] The recovery ejection position R is also normally used as the home position of carriage 302. When the ink jet printer is powered on, the nozzles are covered by cap 304, and the ink jet head 30 waits at the recovery ejection position R until a print command is received.

[0029] The receive port 170 shown in Fig. 1 is a serial or parallel communications port for receiving an image signal from a host device. Image data contained in the image signal received through the receive port 170 is stored in a print pattern storage means 110 such as a RAM. When the print pattern storage means 110 is a RAM, data stored at a memory address specified by the print operation controller (CPU) 200 using signals such as an address signal and read/write signal is sequentially read and output.

[0030] The recovery ejection data generator 160 generates data for recovery ejection, i.e., generates the data used to drive and eject ink drops from all nozzles, and outputs the data to the selector 150. The selector 150 selects either the output of print pattern storage means 110 or recovery ejection data generator 160, and passes the selected data to the drive signal generator 180.

[0031] The drive signal generator 180 generates a drive data signal D1 to Dn for each nozzle N1 to Nn based on the selected data output from the selector 150. Drive data signal D1 to Dn defines the width and timing of the drive pulse applied to the pressure generating means of each nozzle, and is output synchronized to a timing pulse output from the print operation controller (CPU) 200.

[0032] Memory 210 comprises a RAM for storing print commands and other data contained in the image signal, and a ROM for storing the program controlling other components. As a result, the print operation controller (CPU) 200 accesses the program stored in memory 210 to appropriately control the various components.

[0033] The counter 220 is a timer or similar device for counting the amount of time following recovery ejection. When a prescribed period has passed, the counter 220 outputs a time-up signal instructing output of the recovery ejection signal, or sets a flag to indicate that a prescribed period has elapsed.

[0034] The ink jet head driver 190 boosts the drive signal output from the drive signal generator 180 to drive the ink jet head 30. The other driver 195 drives the motor 80. Operation of the motor 80 is controlled by a control

signal from the CPU 200.

[0035] The drive voltage selector 130 selects the drive pulse applied to the pressure generating means of the ink jet head 30. The drive pulse is either a high amplitude drive pulse causing ink drop ejection, or a low amplitude drive pulse for mobilizing ink inside the nozzles without ejecting ink drops. The drive voltage selector 130 controls the ink jet head driver 190 to apply a high amplitude drive pulse to any nozzle operated to eject ink for recording according to the drive signal output by the drive signal generator 180, and to apply a low amplitude drive pulse to all other nozzles.

#### Embodiment of an ink jet head used by the present invention

[0036] Fig. 3 is a cross section of an ink jet head appropriate to the present invention, Fig. 4 is a plan view of said ink jet head, and Fig. 5 is a partial cross section thereof.

[0037] As shown in the figures, this ink jet head 30 has a three layer structure comprising a silicon nozzle plate 2 disposed on top of a silicon substrate 1, and a borosilicate glass plate 3 having a thermal expansion coefficient substantially equal to that of silicon and being disposed below the silicon substrate 1 as shown in Fig. 3. Etched into the surface (top surface as seen in Fig. 3) of the middle silicon substrate 1 are recesses that function as a plurality of independent ink chambers 5 and a common ink chamber 6 interconnected to each of the independent ink chambers 5 by means of corresponding ink supply paths 7. It should be noted that the formation of ink chambers 5, common ink chamber 6, and ink supply paths 7 is completed by covering the recesses, i.e., the surface of silicon substrate 1, with the nozzle plate 2.

[0038] A plurality of nozzles 11 is formed in the nozzle plate 2 at a position corresponding to an end part of each ink chamber 5. Each nozzle 11 is open to the corresponding ink chamber 5. An ink supply opening 12 is formed through the glass plate 3 and the silicon substrate 1. Ink is supplied from ink tank 301 (Fig. 2) through ink supply tube 306 (Fig. 2) to charge the common ink chamber 6 through ink supply opening 12. The ink charged into common ink chamber 6 is then supplied through ink supply paths 7 to the corresponding independent ink chambers 5.

[0039] The bottom wall 8 of ink chamber 5 is thin, and functions as a diaphragm that can be flexibly displaced up and down as shown in Fig. 3. This bottom wall 8 part of ink chamber 5 is therefore alternatively referred to in the following description as diaphragm 8.

[0040] The surface of borosilicate glass plate 3 bonded in contact with the bottom of silicon substrate 1 is also etched to form a plurality of shallow recesses 9 at positions corresponding to the ink chambers 5 in silicon substrate 1. The bottom wall 8 of each ink chamber 5 therefore opposes the surface 92 of a corresponding re-

cess 9 with an extremely narrow gap in between. A surface projection 92b projecting from surface 92 toward bottom wall 8 is provided on the surface of recess 9 in the area of nozzle 11. As a result, the gap between surface projection 92b and bottom wall 8b is less than the gap at other areas between surface 92 and bottom wall 8a.

[0041] The bottom wall 8 of each ink chamber 5 functions as an electrode for storing a charge. A segment electrode 10 is formed on recess surface 92 of glass plate 3 in a position opposite bottom wall 8 of each ink chamber 5. The surface of each segment electrode 10 is covered by an inorganic glass insulation layer 15 of thickness G0 (see Fig. 5). As a result, each segment electrode 10 and the corresponding ink chamber bottom wall 8 form opposing electrodes having an insulation layer 15 disposed in between and an electrode gap that varies according to the location. More specifically, the electrode gap between these opposing electrodes is a distance G2 near the nozzle, and a distance G1 in other areas.

[0042] As shown in Fig. 4, ink jet head driver 190 charges and discharges the opposing electrodes according to the control signal output from the CPU 200 and the drive signal output from drive signal generator 180. The driver 190 outputs directly to each segment electrode 10, and directly to a common electrode terminal 22 formed on silicon substrate 1. Impurities injected to silicon substrate 1 make the latter conductive, enabling common electrode terminal 22 to supply a charge to bottom wall 8. When it is necessary to supply a voltage to the common electrode with lower resistance, a metallic thin-film or other conductive material can be formed on one surface of the silicon substrate 1 by such methods as vapor deposition or sputtering. The silicon substrate 1 and borosilicate glass plate 3 are bonded in the present exemplary embodiment by anodic bonding, and a conductive film is therefore formed on the same surface of the silicon substrate 1 on which the ink path is formed.

[0043] A cross section of the ink jet head through line III-III of Fig. 4 is shown in Fig. 5. When a drive voltage is applied from driver 190 to opposing electrodes, Coulomb force is produced in the opposing electrode gap, thus displacing the bottom wall (diaphragm) 8 toward segment electrode 10 and increasing the capacity of the ink chamber 5 (see Fig. 5 (b)). When the driver 190 then causes the charge stored in the opposing electrodes to rapidly discharge, the elastic restoring force of the bottom wall 8 causes the bottom wall 8 to return to the original static position, thereby rapidly compressing the capacity of the ink chamber 5 (Fig. 5 (c)). The pressure thus generated inside the ink chamber causes part of the ink charge in ink chamber 5 to be ejected as an ink drop from the nozzle 11 corresponding to that ink chamber.

[0044] As described above, however, the opposing electrode gap has two portions, a portion with a small

gap G2 and another portion with a large gap G1. It is therefore possible to displace bottom wall 8b of diaphragm 8 located at small gap G2 to the opposing wall of surface projection 92b by applying a smaller drive voltage than is needed to displace bottom wall 8a at the large gap G1.

[0045] Two vibration modes can therefore be achieved by appropriately applying a high drive voltage causing displacement of the entire diaphragm toward opposing wall surface 92, and a low drive voltage causing displacement of only diaphragm bottom wall 8b at small gap G2. The vibration mode achieved by applying a high drive voltage causes diaphragm 8 to vibrate sufficiently to eject an ink drop, and the vibration mode achieved by applying a low drive voltage produces diaphragm vibrations mobilizing ink around the nozzle.

#### Drive circuit

[0046] An exemplary embodiment of a drive circuit according to the present invention is described next below with reference to Figs. 6 to 8. Fig. 6 is a circuit diagram of a preferred embodiment of a selector 150 shown in Fig. 1, and Fig. 7 is a circuit diagram showing the major components of a driver 190 comprising a drive voltage selection means.

[0047] Referring to Fig. 6, a receive buffer 110 functions as the print pattern storage means shown in Fig. 1. Based on drive data signal D1 to Dn output from the selector 150, drive pulse signal generator 180 applies a drive signal to each nozzle N1 to Nn. It should be noted that receive buffer (print pattern storage means) 110, selector 150, and drive pulse signal generator 180 can be integrated into a single gate array.

[0048] Receive buffer 110 stores one column of print data, outputs the data at a latch signal from the print operation controller (CPU) 200, and then obtains the next data set from the preceding stage.

[0049] As shown in Fig. 6, selector 150 comprises two AND elements 152 and 153 and one OR element 154 per nozzle. Based on a selection signal Se output from the CPU 200, the selector 150 selects either print data output from the receive buffer 110, or recovery ejection data produced by recovery ejection data generator 160, and outputs to drive pulse signal generator 180.

[0050] When the selection signal Se is low, NOT element 151 outputs high, resulting in a high input to AND element 152. As a result, the print data supplied from the receive buffer 110 to the other input of AND element 152 is sent to the drive pulse signal generator 180. When the selection signal Se is high, the data from the receive buffer 110 is not output to the drive pulse signal generator 180, and the recovery ejection data is sent to the drive pulse signal generator 180. As a result, the data sent to the drive pulse signal generator 180 results in periodic ink drop ejection from all nozzles.

[0051] A timing pulse Tp of a prescribed pulse width is applied to one input of each NAND element 181 of

drive pulse signal generator 180. Data signal D1 to Dn output from selector 150 is inverted by NOT element 182, and the inverted data signal is applied to the other input of each NAND element 181.

[0052] The ink jet head driver 190 comprises a driver 190a for driving the common electrode terminal 22 (diaphragm 8) side of the ink jet head, and a driver 190b for driving each segment electrode 10 based on the drive data signal D1 to Dn. Driver 190a switches the voltage applied to the common electrode terminal 22 between a voltage V1 and ground (0 V); driver 190b switches the voltage applied to the segment electrode 10 between a second voltage V2 and ground (0 V). Note that V1 is greater than V2, and two different voltages, V1 and V1-V2, (or three voltages if 0 V is included) can be applied to the opposing electrode gap (between the diaphragm 8 and segment electrode 10).

[0053] Driver 190a comprises primarily transistors Q1 and Q2, and resistors R1 and R2. The timing pulse Tp is applied to the input terminal of the driver 190a. When the timing pulse Tp switches to the on state (high), transistor Q1 is on, and voltage V1 is applied to common electrode terminal 22. When the timing pulse Tp is off (low), transistor Q1 is off, transistor Q2 is on, and the common electrode terminal 22 is connected to the ground (0 V).

[0054] The other driver 190b comprises a plurality of circuits comprising primarily transistors Q3 and Q4 and resistors R3 and R4. Note that the number of these circuits matches the number n of segment electrodes 10. Each input terminal of driver 190b is connected to an output terminal of drive pulse signal generator 180. When data Dx for an X-th nozzle 11x goes high, i.e., when an ink drop is to be ejected from nozzle 11x, and timing pulse Tp goes on (high), transistor Q4 goes on and the corresponding segment electrode 10x is connected to ground (0 V).

[0055] When data Dx for nozzle 11x goes low, i.e., when an ink drop is not to be ejected from nozzle 11x, and timing pulse Tp goes on (high), transistor Q3 goes on and voltage V2 is applied to the corresponding segment electrode 10x.

[0056] A logic table showing the relationship between the timing pulse Tp, data signal Dx, and the potential of the opposing electrodes is shown in Fig. 8. As will be seen from this table, when timing pulse Tp and data signal Dx are both high, the potential difference between the opposing electrodes is V1. Charging thus causes the entire diaphragm 8 to be displaced toward the segment electrode as shown by state (1) in Fig. 8. When the timing pulse Tp goes low from this state, the opposing electrodes become equipotential, the stored charge is discharged, and the diaphragm 8 returns to the original non-displaced position. This produces pressure inside ink chamber 5, which causes an ink drop to be ejected from nozzle 11 (state 2).

[0057] When the timing pulse Tp is high and data signal Dx is low, the potential difference of the opposing

electrode gap is V1-V2, and the diaphragm 8 is displaced only in the area of the segment electrode area 10b (state 3). When the timing pulse Tp then goes low from this state, the opposing electrode gap again becomes equipotential, the stored charge is discharged, and the diaphragm 8 returns to the original non-displaced position. In this case, however, the amplitude of diaphragm 8 vibration is smaller than when the diaphragm 8 returns from the state (1) position to the state (2) position. The pressure inside the ink chamber 5 therefore does not rise sufficiently to eject an ink drop from the nozzle 11, and vibration of diaphragm 8 results only in mobilizing ink around the nozzle 11.

[0058] The operation of the circuits comprised as above is described next below with reference to the timing chart shown in Fig. 9.

[0059] For printing, the selection signal Se output from the CPU 200 is low. A latch signal from the CPU 200 sets the column print data that have been written into receive buffer 110 to the drive pulse signal generator 180. The selection signal Se from the CPU 200 remains low while printing continues, thereby steadily supplying the column print data to the drive signal generator 180 and therefrom to the driver 190.

[0060] The timing pulse Tp input to drivers 190a and 190b is a periodic pulse of period T and pulse width Pw as shown in Fig. 9. The time from the start of opposing electrode gap charging to the start of discharging is determined by pulse width Pw.

[0061] The motor 80 for transporting carriage 302 is driven synchronized to timing pulse Tp, and the input of the latch signal to the receive buffer is synchronized to timing pulse Tp.

[0062] Based on the print data, the data signal Dx input to the drive pulse signal generator 180 is output high synchronized to the timing pulse Tp when an ink drop is to be ejected. The data signal Dx is therefore sequentially output high-low-low when dot 1 is printed and dots 2 and 3 are not printed as shown in Fig. 9. This results in drive pulses of pulse width Pw and amplitude V, V1-V2, and V1-V2 being sequentially applied to the opposing electrode gap. This sequence of drive pulses causes ink drop ejection at dot 1, and ink mobilization around the nozzle without ink drop ejection at dots 2 and 3.

[0063] The simple circuit configuration of the present invention can thus apply a low amplitude drive pulse to non-ejecting nozzles only to mobilize ink around the nozzle and prevent a rise in the viscosity of ink around the nozzle while printing is in progress, and can accomplish this without complicated control. It is therefore possible to suppress a rise in the viscosity of ink in infrequently used nozzles. This means that differences in viscosity at the nozzle tip resulting from differences in the frequency of nozzle use can be reduced, the interval between nozzle recovery operations can be increased, and wasteful consumption of ink during nozzle recovery can be reduced. The method of the present invention is

particularly effective in the case of a color ink jet printer having a plurality of nozzles grouped by color because a noticeable difference in the frequency of nozzle use occurs easily with such printers.

[0064] Latch signal output from the CPU 200 stops and the printing process is interrupted during the nozzle recovery process. The ink jet head 30 is then moved to the recovery ejection position R, selection signal Se is set high, recovery ejection data causing all nozzles to eject periodically is set to the drive pulse signal generator 180, and all nozzles are thus operated to eject plural times.

[0065] If all data signals are held low and timing pulse Tp is applied while ink jet head 30 is moved to the recovery ejection position R, a rise in the viscosity of ink around the nozzle can be suppressed by applying a low amplitude drive pulse causing mobilization of ink near the nozzle.

[0066] It should be noted that an exemplary drive circuit according to the preceding embodiment of the present invention has been described driving an ink jet head comprising an electrostatic actuator as a pressure generating means. The invention shall not be so limited, however, and the same effect can be achieved in ink jet heads in which a piezoelectric element, heating element, or other type of pressure generating means is used. More specifically, the present invention can apply two drive pulses of different amplitudes to such other types of ink jet heads. Displacement varies according to the voltage of the applied drive pulse when a piezoelectric element is used, and ink around the nozzle can therefore be mobilized without ink ejection. The amount of heat generated likewise varies with a heating element, and a low amplitude drive pulse can therefore again be used to mobilize ink around the nozzle without ink ejection.

#### Preferred embodiment of a control method

[0067] A preferred embodiment of an ink jet printer control method according to the present invention is described next below with reference to the flow charts in Fig. 10. Note that the main routine is shown in Fig. 10 (a), and a subroutine is shown in Fig. 10 (b).

[0068] When the printer power is turned on, the control unit 100 and printing unit 90 are initialized (step S0). Recovery process A is then accomplished (step S1) to expel any ink that had become more viscous during the period of printer non-use. Recovery process A applies suction to the capped nozzles using pump 303, and by this action removes ink that had become too viscous to eject from the nozzles.

[0069] It should be noted here that recovery process B described below differs from recovery process A in that it applies a drive pulse to the pressure generating means to expel by forcing out from the nozzle ink that had increased in viscosity near the nozzle.

[0070] After recovery process A is completed, counter

220 is reset and begins counting a prescribed period. This counting operation is used to determine the passage of a required minimum period, and to count the time elapsed from that minimum period. Output of a time-up signal is then detected (step S2) to determine whether the counter 220 has counted the prescribed time, that is, whether the prescribed period has elapsed. If the time-up signal is detected, recovery process B is performed (step S8).

[0071] Recovery process B is shown as subroutine (b) comprising steps SS1 to SS3 in Fig. 10. This subroutine starts by moving carriage 302 carrying ink jet head 30 to the home position, which is recovery ejection position R (step SS1). Recovery ejection (step SS2) then expels increased viscosity ink from all nozzles into the cap. Ink is generally ejected anywhere from several to several hundred times per nozzle to expel any defective, increased-viscosity ink from the nozzles. After ejection, the carriage is returned to the position from which it was moved to the recovery ejection position R (step SS3) to complete recovery process B.

[0072] It should be noted that if the carriage is already positioned at the recovery ejection position R when the time-up signal is output, it is obviously not necessary to move the carriage (step SS1 can be skipped) before recovery ejection in step SS2, and it is not necessary to move the carriage when recovery ejection is completed (step SS3 can be skipped). Thus, it is sufficient to simply eject ink from the nozzles while the nozzles remain capped.

[0073] It should be further noted that the number of ink expulsions accomplished in recovery process B is determined in this embodiment by a prescribed time counted by counter 220.

[0074] If in step S2 the time-up signal is not detected, it is determined (step S3) whether printing is to be accomplished. If printing is not requested, step S3 loops back to step S2.

[0075] If a print command signal has been received from a host device and printing is requested, recovery process B is performed (step S4), and the counter 220 is then reset (step S5). After the printing process is then accomplished (step S6), the carriage is returned to the home position (step S7), and the nozzles are capped. If the power is still on (step S9), the procedure then loops back to step S2. If the power is off (step S9), the procedure terminates.

[0076] As thus described, a recovery process A using a pump to purge the nozzles is first accomplished when the power is turned on. Thereafter, a recovery process B to recover the nozzles by ejection is performed immediately before printing commences and at a prescribed regular interval when printing is not performed.

[0077] It should be further noted that after recovery process A, the control method of the present invention applies a low amplitude drive pulse to all nozzles when not printing, and to the non-ejecting nozzles when printing, to constantly mobilize ink near the nozzles. As a

result, the frequency of recovery process B can be reduced, and ink waste can be prevented, when compared with methods which do not apply this type of drive pulse.

[0078] Fig. 11 is a timing chart of various signals used to achieve the embodiment of the invention described with reference to Fig. 10.

[0079] Signal 40a indicates the power supply state; 40b indicates the count of the counter 220, that is, the timer signal. The dot-dash line 40f indicates the time-up time counted by the timer signal 40b. The timer signal 40b is indicative of a particular value such as time or a clock count. The time-up signal 40c is output by the counter 220 when the prescribed time is up. The print signal 40d is received through receive port 170. The recovery process signal 40e is output appropriately by the CPU.

[0080] When the CPU receives time-up signal 40c and print signal 40d, it instructs the various means shown in Fig. 1 to perform the recovery process according to the procedure of the flow chart shown in Fig. 10.

[0081] When the power supply is turned on at a41, recovery process A is performed (e31). If the print signal 40d is not received and the printer therefore does not print within a prescribed time, the time-up signal 40c is set high to a time-up state c41. This causes recovery process B (e42) to be performed. Soon thereafter when a print signal occurs at d41, the print signal 40d causes the counter 220 to be reset and the recovery process B (e51) to be performed. If no print signal 40d is detected thereafter for a sufficiently long period, the recovery process B is repeated (e43, e44, e45) each time the time-up signal 40c indicates the prescribed time has elapsed (c42, c43, c44).

[0082] It should be noted that if the time-up time 40f is short, the nozzle recovery process will be performed frequently, ink consumption will therefore increase, and the amount of ink available for printing will thus decrease. As a result, the print capacity (number of printable characters) per head or cartridge decreases. Conversely, if the time-up time 40f is too long, the amount of unusable ink in the nozzles increases, and the amount of ink that must be ejected in recovery process B immediately before printing increases.

[0083] As described above, however, the control method of the present invention causes a low amplitude drive pulse to be applied to all nozzles during non-printing times to mobilize ink around the nozzles. When compared with methods in which such a drive pulse is not applied, the method of the present invention can therefore set the time-up time 40f to a longer time without increasing the ink volume ejected during recovery process B. More specifically, the control method of the present invention can decrease the frequency of the nozzle recovery process and thereby prevent ink waste.

[0084] As also described above, the method of the present invention uses a time-up signal 40c output by a counter 220, and a print signal 40d received from a host

device, as triggers for initiating the recovery process B. It will be obvious, however, that it is also possible to use only one of these signals as the trigger for recovery process B. For example, the time-up signal could be used as a trigger for recovery process A, and only the print signal could be used as a trigger for recovery process B. In this case, recovery process B could be performed to eject ink several ten times preceding a printing process when a print signal is received from a host, recovery process B could be performed to eject several times after printing a prescribed number of lines, and recovery process A could be triggered by the time-up signal.

#### Preferred embodiment of a drive pulse for a nozzle recovery process

[0085] Fig. 12 is a timing chart of an exemplary drive pulse used for a nozzle recovery process according to the present invention.

[0086] Note that the circuit diagrams shown in Fig. 6 and Fig. 7 are appropriately referenced in the following description of an exemplary drive pulse applied to an ink jet head during a nozzle recovery process according to the present invention.

[0087] As shown by the waveform in Fig. 12, line (2), the timing pulse  $T_p$  is a regular sequence of pulses  $t_1$  to  $t_n$  having a period  $T$  and a prescribed pulse width  $P_w$ . Note that this timing pulse  $T_p$  is also used for ink jet head drive during a printing process.

[0088] The recovery ejection signal  $P_d$  shown at Fig. 12, line (1), is input to selector 150 and output to drive signal generator 180 at the nozzle recovery process. Based on this recovery ejection signal  $P_d$ , driver 190 applies a drive pulse as shown at Fig. 12, line (3), to ink jet head 30. Ink drops are thus ejected from all nozzles during the nozzle recovery process. Note that the recovery ejection signal  $P_d$  of this embodiment is output synchronized to the timing pulse  $T_p$  with one on pulse output every fourth timing pulse  $T_p$ .

[0089] Note that the drive voltage applied to the ink jet head is indicated by the amplitude (vertical axis) of the drive pulse shown in Fig. 12 (3).

[0090] The drive pulses  $f_1$ ,  $f_2$ ,  $f_3$ , and  $f_4$  output at timing points  $t_4$ ,  $t_8$ ,  $t_{12}$ , and  $t_{16}$  are drive pulses causing ink ejection from the nozzles. The drive voltage of those drive pulses therefore has the same amplitude  $V_H$  as a drive pulse used for printing. The amplitude of drive pulses  $f_{11}$ ,  $f_{12}$ ,  $f_{13}$ ,  $f_{21}$ ,  $f_{22}$ ,  $f_{23}$ ,  $f_{31}$ ,  $f_{32}$ ,  $f_{33}$ ,  $f_{41}$ ,  $f_{42}$ , and  $f_{43}$  output at the same period  $T$  as timing pulse  $T_p$  between ink ejection drive pulses is an amplitude  $V_L$  lower than amplitude  $V_H$ .

[0091] As a result of this drive method, the ink jet head is driven three times at drive pulse  $V_L$  at the same period  $T$  as the timing pulse  $T_p$ , and the ink jet head is then driven once at drive voltage  $V_H$ . This operating sequence, or recovery process unit, is repeated four times.

[0092] Driving the ink jet head with low amplitude drive pulses  $f_{11}$ ,  $f_{21}$ , and  $f_{13}$  mobilizes ink inside the

nozzles, thereby lowering the ink viscosity at the nozzle tip, and enabling efficient ink ejection when drive pulse f1 is applied.

[0093] It should be noted that the exemplary embodiment of the present invention described above applies three low amplitude drive pulses followed by one high amplitude drive pulse in one recovery process unit, and repeats this recovery process unit four times. The invention shall not be so limited, however, as it will be obvious that various combinations of low and high amplitude drive pulses can be used according to the properties of the ink, the interval between nozzle recovery processes, and other factors.

[0094] An alternative embodiment of an exemplary drive pulse used for a nozzle recovery process according to the present invention is shown in Fig. 13 (1).

[0095] Before a drive pulse g1 of drive voltage VH for ejecting ink is applied, a drive pulse g11, g12, g13, and g14 of a drive voltage VLL having a polarity different from that of drive pulse g1 is applied four times. This sequence constitutes one recovery process unit, which is repeated three times. Note that this drive wave can be achieved using a circuit as shown in Fig. 7 by setting the voltage V2 supplied to driver 190b higher than the voltage supplied to driver 190a so that  $VLL = V2 - V1$ .

[0096] When an electrostatic actuator is used as the pressure generating means shown in Fig. 3, driving results in accumulation of a residual charge in the actuator. This causes a problem unique to an electrostatic actuator, that is, that the diaphragm may not return when the charge between the opposing electrodes is discharged, and the volume of the ink drops ejected from the nozzle then gradually decreases.

[0097] The method of the present invention, however, applies drive pulses g11 to g14 having a polarity opposite that of the drive pulse g1. Applying these drive pulses g11 to g14 to drive the head can both mobilize ink in the nozzle to enable efficient ink ejection when drive pulse f1 is applied, and reduce the residual charge accumulated in the electrostatic actuator.

[0098] A further alternative embodiment of an exemplary drive pulse used for a nozzle recovery process according to the present invention is shown in Fig. 13 (2).

[0099] In this example drive pulses f11, f12, and f13 of drive voltage VL are applied before drive pulse f1 of drive voltage VH is applied to eject ink. After drive pulse f1 is applied, reverse polarity drive pulses g11 and g12 of drive voltage VLL are applied to complete a recovery process unit, and this recovery process unit is repeated three times.

[0100] As this example illustrates, it is also possible to combine drive pulses f11 to f13 for mobilizing ink near the nozzles, with drive pulses g11 and g12 for both mobilizing ink near the nozzles and reducing the residual charge accumulated in the electrostatic actuator.

[0101] An ink jet printer according to the present invention as described above can be used as an output terminal for a computer, a color printing apparatus, and

a facsimile machine, and is particularly well suited as an ink jet recording apparatus for use in fields requiring low operating cost and high reliability.

## Claims

1. A method of driving an ink jet printer comprising a plurality of nozzles (11) for ejecting ink drops, a corresponding plurality of pressure generating means (8, 10) for pressurizing ink in the respective nozzles, and means (80) for transporting said nozzles relative to a printing medium for printing on the printing medium in accordance with print data, said method comprising the steps of
  - generating a reference signal of a single frequency,
  - applying to each of said pressure generating means synchronized to the reference signal either a first type electric pulse of an amplitude enabling ink drop ejection, or a second type electric pulse of an amplitude lower than that of the first type electric pulse for mobilizing ink inside a nozzle,
  - performing a printing process wherein said first type electric pulse is selectively applied to said pressure generating means according to said print data, and
  - performing a nozzle recovery process to prevent nozzle clogging by applying to said pressure generating means two or more consecutive pulse cycles each pulse cycle consisting of a series of second type electric pulses followed by one first type electric pulse said recovery process being performed in response to a print command instructing printing to be performed.
2. The method according to claim 1, wherein said ink jet printer is a serial printer and said nozzle recovery process is executed once every print line.
3. The method according to claim 1, wherein said nozzle recovery process is executed each time after a print command is received and before printing following this print command is executed.
4. The method according to according to any one of the preceding claims for driving an ink jet printer comprising electrostatic pressure generating means each having a diaphragm (8) disposed in a part of an ink path contiguous to a nozzle (11), and an electrode (10) opposing said diaphragm, wherein the polarity of the second type electric pulse is different from the polarity of the first type electric pulse.
5. The method according to according to any one of claims 1 to 3 for driving an ink jet printer comprising electrostatic pressure generating means each hav-

- ing a diaphragm (8) disposed in a part of an ink path contiguous to a nozzle (11), and an electrode (10) opposing said diaphragm, wherein a third type electric pulse of a polarity different from that of the first type electric pulse and that of the second type electric pulse is generated, and said recovery process comprises applying said third type pulse subsequently to said first type pulse synchronized to the reference signal.
6. The method according to any one of claims 1 to 4 for driving an ink jet printer comprising electrostatic pressure generating means each having a diaphragm (8) disposed in a part of an ink path contiguous to a nozzle (11), and an electrode (10) opposing said diaphragm, comprising the further steps of performing said printing process by applying the first type electric pulse selectively to said pressure generating means according to said print data so as to eject ink drops from the respective nozzles for printing on the recording medium, and applying the second type electric pulse to nozzles other than the nozzles to which the first type electric pulse was applied during said printing.
7. An ink jet printer having a plurality of nozzles (11) for ejecting ink drops, a corresponding plurality of pressure generating means (8, 10) for pressurizing ink in the respective nozzles, and means (80) for transporting said nozzles relative to a printing medium for printing on the printing medium in accordance with print data, and comprising  
reference signal generation means (200) for generating a reference signal of a single frequency,  
drive means (130, 190) for applying to each of said pressure generating means synchronized to the reference signal either a first type electric pulse of a first amplitude enabling ink drop ejection, or a second type electric pulse of a second amplitude lower than the first amplitude for mobilizing ink inside a nozzle,  
printing means (110, 150, 180, 190) for selectively applying the first type electric pulse to said pressure generating means according to the recording content, and  
recovery process means (160, 150, 180, 190) for preventing nozzle clogging said recovery process means being responsive to a print command instructing printing to be performed for applying to the pressure generating means two or more consecutive pulse cycles each pulse cycle consisting of a series of second type electric pulses followed by one first type electric pulse.
8. The ink jet printer according to claim 7, wherein the pressure generating means comprises a diaphragm (8) disposed in a part of an ink path contiguous to a nozzle (11), and an electrode (10) opposing said diaphragm for electrostatically displacing the diaphragm by means of an applied electric pulse.
9. The ink jet printer according to claim 8, wherein said pressure generating means comprises a first and a second part, said first part being constituted by a first portion (8b) of said diaphragm (8) and a first portion (10b) of said electrode (10) and said second part being constituted by a second portion (8a) of said diaphragm and a second portion (10a) of said electrode, said first part being disposed nearer to said nozzle (11) than said second part and responsive to said first and said second amplitude while said first part is responsive only to said first amplitude.
10. The ink jet printer according to any one of claims 7 to 9, further comprising drive means (190) for generating the second type electric pulse having a polarity different from the polarity of the first type electric pulse.
11. The ink jet printer according to claim 8 or 9, further comprising drive means (190) for generating a third type electric pulse of a polarity different from that of the first type electric pulse and that of the second type electric pulse, and applying any one of these electric pulses to a pressure generating means synchronized to the reference signal.
12. The ink jet printer according to claim 7, 8 or 9, further comprising printing means for selectively applying the first type electric pulse to said pressure generating means according to the recording content to eject ink drops from a nozzle for printing on a recording medium, and applying the second type electric pulse to nozzles other than the nozzles to which the first type electric pulse was applied during printing.
13. The ink jet printer according to any one of claims 7 to 12, further comprising a plurality of nozzles grouped according to color for ejecting ink drops in a plurality of colors.

#### Patentansprüche

1. Verfahren zum Treiben eines Tintenstrahldruckers mit einer Mehrzahl von Düsen (11) zum Ausstoßen von Tintentropfen, einer entsprechenden Mehrzahl von Druckerzeugungsmitteln (8, 10) zum unter Druck Setzen von Tinte in den jeweiligen Düsen, und Mitteln (80) zum Transportieren der Düsen in Bezug auf ein Druckmedium zum Drucken auf das Druckmedium entsprechend Druckdaten, wobei das Verfahren folgende Schritte umfasst:

- Erzeugen eines Referenzsignals mit einer einzigen Frequenz,  
 Anlegen an jedes Druckerzeugungsmittel, synchronisiert mit dem Referenzsignal, entweder eines elektrischen Impulses eines ersten Typs mit einer den Ausstoß eines Tintentropfens ermöglichenden Amplitude oder eines elektrischen Impulses eines zweiten Typs mit einer niedrigeren Amplitude als der des elektrischen Impulses vom ersten Typ zum Beweglichmachen von Tinte innerhalb einer Düse,  
 Durchführen eines Druckprozesses, wobei der elektrische Impuls des ersten Typs selektiv an die Druckerzeugungsmittel entsprechend den Druckdaten angelegt wird, und  
 Durchführen eines Düsenwiederherstellungsprozesses zum Verhindern von Düsenverstopfung durch Anwenden zweier oder mehrerer aufeinanderfolgender Impulszyklen auf die Druckerzeugungsmittel, wobei jeder Impulszyklus aus einer Serie von elektrischen Impulsen des zweiten Typs, gefolgt von einem elektrischen Impuls des ersten Typs besteht, wobei der Wiederherstellungsprozess in Reaktion auf einen Druckbefehl durchgeführt wird, der das Durchführen von Drucken anordnet.
2. Verfahren nach Anspruch 1, bei dem der Tintenstrahldrucker ein serieller Drucker ist und der Düsenwiederherstellungsprozess einmal pro Druckzeile durchgeführt wird.
3. Verfahren nach Anspruch 1, bei dem der Düsenwiederherstellungsprozess jedesmal durchgeführt wird, nachdem ein Druckbefehl empfangen worden ist und bevor das auf diesen Druckbefehl folgende Drucken durchgeführt wird.
4. Verfahren nach einem der vorhergehenden Ansprüche zum Treiben eines Tintenstrahldruckers mit elektrostatischen Druckerzeugungsmitteln, die jeweils eine Membran (8), die in einem an eine Düse (1) angrenzenden Teil eines Tintenweges angeordnet ist, und eine der Membran gegenüberliegende Elektrode (10) aufweisen, wobei die Polarität des elektrischen Impulses vom zweiten Typ von der Polarität des elektrischen Impulses vom ersten Typ verschieden ist.
5. Verfahren nach einem beliebigen der Ansprüche 1 bis 3 zum Treiben eines Tintenstrahldruckers mit elektrostatischen Druckerzeugungsmitteln, die jeweils eine in einem an eine Düse (11) angrenzenden Teil eines Tintenweges angeordnete Membran (8) und eine der Membran gegenüberliegende Elektrode (10) aufweisen, wobei ein elektrischer Impuls eines dritten Typs mit einer Polarität, die von der des elektrischen Impulses vom ersten Typ und der des elektrischen Impulses vom zweiten Typ verschieden ist, erzeugt wird und der Wiederherstellungsprozess das Anlegen des dritten Impulses anschließend an den Impuls vom ersten Typ synchronisiert mit dem Referenzsignal umfasst.
6. Verfahren nach einem beliebigen der Ansprüche 1 bis 4 zum Treiben eines Tintenstrahldruckers mit elektrostatischen Druckerzeugungsmitteln, die jeweils eine Membran (8), die in einem an eine Düse (11) angrenzenden Teil eines Tintenweges angeordnet ist, und eine der Membran gegenüberliegende Elektrode (10) umfassen, ferner mit den Schritten:
- Durchführen des Druckprozesses durch Anlegen des elektrischen Impulses vom ersten Typ selektiv an die Druckerzeugungsmittel entsprechend den Druckdaten, um Tintentropfen aus den jeweiligen Düsen zum Drucken auf das Aufzeichnungsmedium auszustoßen, und  
 Anlegen des elektrischen Impulses vom zweiten Typ an andere Düsen als die, an die während des Druckens der elektrische Impuls vom ersten Typ angelegt wurde.
7. Tintenstrahldrucker mit einer Mehrzahl von Düsen (11) zum Ausstoßen von Tintentropfen, einer entsprechenden Mehrzahl von Druckerzeugungsmitteln (8, 10) zum unter Druck Setzen von Tinte in den jeweiligen Düsen, und Mitteln (80) zum Transportieren der Düsen in Bezug auf ein Druckmedium zum Drucken auf das Druckmedium entsprechend Druckdaten, mit:
- Referenzsignalerzeugungsmitteln (200) zum Erzeugen eines Referenzsignal mit einer einzigen Frequenz,  
 Treibermitteln (130, 190) zum Anlegen an jedes der Druckerzeugungsmittel, synchronisiert mit dem Referenzsignal, entweder eines elektrischen Impulses eines ersten Typs mit einer ersten Amplitude, die den Ausstoß eines Tintentropfens ermöglicht, oder eines elektrischen Impulses eines zweiten Typs mit einer zweiten Amplitude, die niedriger als die erste Amplitude ist, zum Beweglichmachen von Tinte innerhalb einer Düse,  
 Druckmitteln (110, 150, 180, 190) zum selektiven Anlegen des elektrischen Impulses vom ersten Typ an die Druckerzeugungsmittel entsprechend dem Aufzeichnungsinhalt, und  
 Wiederherstellungsmitteln (160, 150, 180, 190) zum Verhindern von Düsenverstopfung, wobei diese Wiederherstellungsmittel auf einen Druckbefehl, der die Durchführung von Drucken anordnet, reagieren mit Anlegen von zwei oder mehr aufeinander-

derfolgenden Impulszyklen an die Druckerzeugungsmittel, wobei jeder Impulszyklus aus einer Serie von elektrischen Impulsen des zweiten Typs, gefolgt von einem elektrischen Impuls des ersten Typs besteht.

8. Tintenstrahl drucker nach Anspruch 7, bei dem das Druckerzeugungsmittel eine in einem an eine Düse (11) angrenzenden Teil eines Tintenweges angeordnete Membran (8) und eine der Membran gegenüberliegende Elektrode (10) zum elektrostatischen Auslenken der Membran durch einen angelegten elektrischen Impuls umfasst. 10
9. Tintenstrahl drucker nach Anspruch 8, bei dem das Druckerzeugungsmittel einen ersten und einen zweiten Teil umfasst, wobei der erste Teil durch einen ersten Abschnitt (8b) der Membran (8) und einen ersten Abschnitt (10b) der Elektrode gebildet ist und der zweite Teil durch einen zweiten Abschnitt (8a) der Membran und einen zweiten Abschnitt (10a) der Elektrode gebildet ist, wobei der erste Teil näher an der Düse (11) als der zweite Teil angeordnet ist und auf die erste und zweite Amplitude reagiert, während der erste Teil nur auf die erste Amplitude reagiert. 15 20 25
10. Tintenstrahl drucker nach einem der Ansprüche 7 bis 9, ferner mit Treibermitteln (190) zum Erzeugen des elektrischen Impulses des zweiten Typs mit einer von der Polarität des elektrischen Impulses des ersten Typs verschiedenen Polarität. 30
11. Tintenstrahl drucker nach Anspruch 8 oder 9, ferner mit Treibermitteln (190) zum Erzeugen eines elektrischen Impulses eines dritten Typs mit einer Polarität, die von der des elektrischen Impulses des ersten Typs und der des elektrischen Impulses des zweiten Typs verschieden ist, und zum Anlegen eines beliebigen dieser elektrischen Impulse an ein Druckerzeugungsmittel synchronisiert mit dem Referenzsignal. 35 40
12. Tintenstrahl drucker nach Anspruch 7, 8 oder 9, ferner mit Druckmitteln zum selektiven Anlegen des elektrischen Impulses des ersten Typs an die Druckerzeugungsmittel entsprechend dem Aufzeichnungsinhalt, um Tropfen aus einer Düse zum Drucken auf ein Aufzeichnungsmedium auszustoßen, und zum Anlegen des elektrischen Impulses des zweiten Typs an andere Düsen als die, an die während des Druckens der elektrische Impuls des ersten Typs angelegt wurde. 45 50
13. Tintenstrahl drucker nach einem der Ansprüche 7 bis 12, ferner mit einer Mehrzahl von nach Farbe gruppierten Düsen zum Ausstoßen von Tintentropfen in einer Mehrzahl von Farben. 55

## Revendications

1. Procédé de commande d'une imprimante à jet d'encre comprenant une pluralité de buses (11) destinées à éjecter des gouttes d'encre, une pluralité correspondante de moyens générant une pression (8, 10) destinés à mettre sous pression l'encre dans les buses respectives, et un moyen (80) destiné à déplacer les buses par rapport à un support d'impression pour permettre l'impression sur le support d'impression conformément aux données d'impression, le procédé comprenant les étapes consistant à : 5 10  
 générer un signal de référence ayant une unique fréquence,  
 appliquer à chacun des moyens générant une pression, en synchronisme avec le signal de référence, soit une impulsion électrique d'un premier type ayant une amplitude permettant l'éjection des gouttes d'encre, soit une impulsion électrique d'un deuxième type ayant une amplitude inférieure à celle de l'impulsion électrique du premier type de façon à activer l'encre à l'intérieur d'une buse,  
 exécuter un processus d'impression, dans lequel l'impulsion électrique du premier type est appliquée de manière sélective aux moyens générant une pression en fonction des données d'impression, et  
 exécuter un processus de régénération des buses afin d'empêcher un colmatage de ces dernières en appliquant aux moyens générant une pression deux cycles d'impulsions successifs ou plus, chaque cycle d'impulsions se composant d'une série d'impulsions électriques du deuxième type suivie d'une impulsion électrique du premier type, le processus de régénération étant exécuté en réponse à une commande d'impression indiquant l'impression à exécuter. 15 20 25 30 35 40 45 50 55
2. Procédé selon la revendication 1, dans lequel l'imprimante à jet d'encre est une imprimante par caractère et le processus de régénération des buses est exécuté une fois par ligne imprimée.
3. Procédé selon la revendication 1, dans lequel le processus de régénération des buses est exécuté après la réception de chaque commande d'impression et avant l'exécution de l'impression suivant cette commande d'impression.
4. Procédé selon l'une quelconque des revendications précédentes pour commander une imprimante à jet d'encre comprenant des moyens générant une pression électrostatique, chaque moyen ayant un diaphragme (8) disposé dans une partie d'un che-

min d'encre contigu à une buse (11) et une électrode (10) opposée au diaphragme, dans lequel la polarité de l'impulsion électrique du deuxième type est différente de celle de l'impulsion électrique du premier type.

5. Procédé selon l'une quelconque des revendications 1 à 3 pour commander une imprimante à jet d'encre comprenant des moyens générant une pression électrostatique, chaque moyen ayant un diaphragme (8) disposé dans une partie d'un chemin d'encre contigu à une buse (11) et une électrode (10) opposée au diaphragme, dans lequel une impulsion électrique d'un troisième type, dont la polarité est différente de celle de l'impulsion électrique du premier type et celle de l'impulsion électrique du deuxième type, est générée, et le processus de régénération comprend l'application de l'impulsion du troisième type après l'impulsion du premier type en synchronisme avec le signal de référence.

6. Procédé selon l'une quelconque des revendications 1 à 4 pour commander une imprimante à jet d'encre comprenant des moyens générant une pression électrostatique, chaque moyen ayant un diaphragme (8) disposé dans une partie d'un chemin d'encre contigu à une buse (11) et une électrode (10) opposée au diaphragme, comprenant les étapes supplémentaires consistant à

exécuter le processus d'impression en appliquant l'impulsion électrique du premier type de manière sélective aux moyens générant une pression conformément aux données d'impression de façon que des gouttes d'encre soient éjectées des buses respectives pour effectuer l'impression sur le support d'enregistrement, et

appliquer l'impulsion électrique du deuxième type aux buses autres que celles sur lesquelles l'impulsion électrique du premier type a été appliquée pendant l'impression.

7. Imprimante à jet d'encre comprenant une pluralité de buses (11) destinées à éjecter des gouttes d'encre, une pluralité correspondante de moyens générant une pression (8, 10) destinés à mettre sous pression l'encre dans les buses respectives, et un moyen (80) destiné à déplacer les buses par rapport à un support d'impression pour permettre l'impression sur le support d'impression conformément aux données d'impression, et comprenant :

un moyen pour générer un signal de référence (200) destiné à générer un signal de référence ayant une unique fréquence, des moyens de commande (130, 190) pour appliquer à chacun des moyens générant une pression, en synchronisme avec le signal de référence, soit une impulsion électrique d'un pre-

mier type ayant une amplitude permettant l'éjection des gouttes d'encre, soit une impulsion électrique d'un deuxième type ayant une deuxième amplitude inférieure à la première amplitude de façon à activer l'encre à l'intérieur d'une buse,

des moyens d'impression (110, 150, 180, 190) permettant d'appliquer de manière sélective l'impulsion électrique du premier type aux moyens générant une pression en fonction du contenu de l'enregistrement, et des moyens pour exécuter un processus de régénération (160, 150, 180, 190) afin d'empêcher un colmatage des buses, le processus de régénération étant sensible à une commande d'impression indiquant l'impression à exécuter, afin d'appliquer aux moyens générant une pression deux cycles d'impulsions successifs ou plus, chaque cycle d'impulsions se composant d'une série d'impulsions électriques du deuxième type suivie d'une impulsion électrique du premier type.

8. Imprimante à jet d'encre selon la revendication 7, dans laquelle les moyens générant une pression comprennent un diaphragme (8) disposé dans une partie d'un chemin d'encre contigu à une buse (11) et une électrode (10) opposée au diaphragme, de façon à déplacer le diaphragme de manière électrostatique au moyen d'une impulsion électrique appliquée.

9. Imprimante à jet d'encre selon la revendication 8, dans laquelle les moyens générant une pression comprennent une première partie et une deuxième partie, la première partie étant constituée d'une première portion (8b) du diaphragme (8) et d'une première portion (10b) de l'électrode (10) et la deuxième partie étant constituée d'une deuxième portion (8a) du diaphragme (8) et d'une deuxième portion (10a) de l'électrode, la première partie étant disposée plus près de la buse (11) que la deuxième partie et sensible aux première et deuxième amplitudes, alors que la première partie est sensible uniquement à la première amplitude.

10. Imprimante à jet d'encre selon l'une quelconque des revendications 7 à 9, comprenant en outre un moyen de commande (190) destiné à générer l'impulsion électrique du deuxième type ayant une polarité différente de celle de l'impulsion électrique du premier type.

11. Imprimante à jet d'encre selon la revendication 8 ou 9, comprenant en outre un moyen de commande (190) destiné à générer l'impulsion électrique du troisième type ayant une polarité différente de celle de l'impulsion électrique du premier type et de celle

de l'impulsion électrique du deuxième type, et à appliquer l'une quelconque de ces impulsions électriques aux moyens générant une pression, en synchronisme avec le signal de référence.

5

12. Imprimante à jet d'encre selon la revendication 7, 8 ou 9, comprenant en outre des moyens d'impression permettant d'appliquer de manière sélective l'impulsion électrique du premier type aux moyens générant une pression en fonction du contenu de l'enregistrement afin d'éjecter des gouttes d'encre d'une buse pour effectuer l'impression sur un support d'enregistrement et d'appliquer l'impulsion électrique du deuxième type aux buses autres que celles sur lesquelles l'impulsion électrique du premier type a été appliquée pendant l'impression.
13. Imprimante à jet d'encre selon l'une quelconque des revendications 7 à 12, comprenant en outre une pluralité de buses groupées par couleur afin d'éjecter des gouttes d'encre ayant une pluralité de couleurs.

10

15

20

25

30

35

40

45

50

55

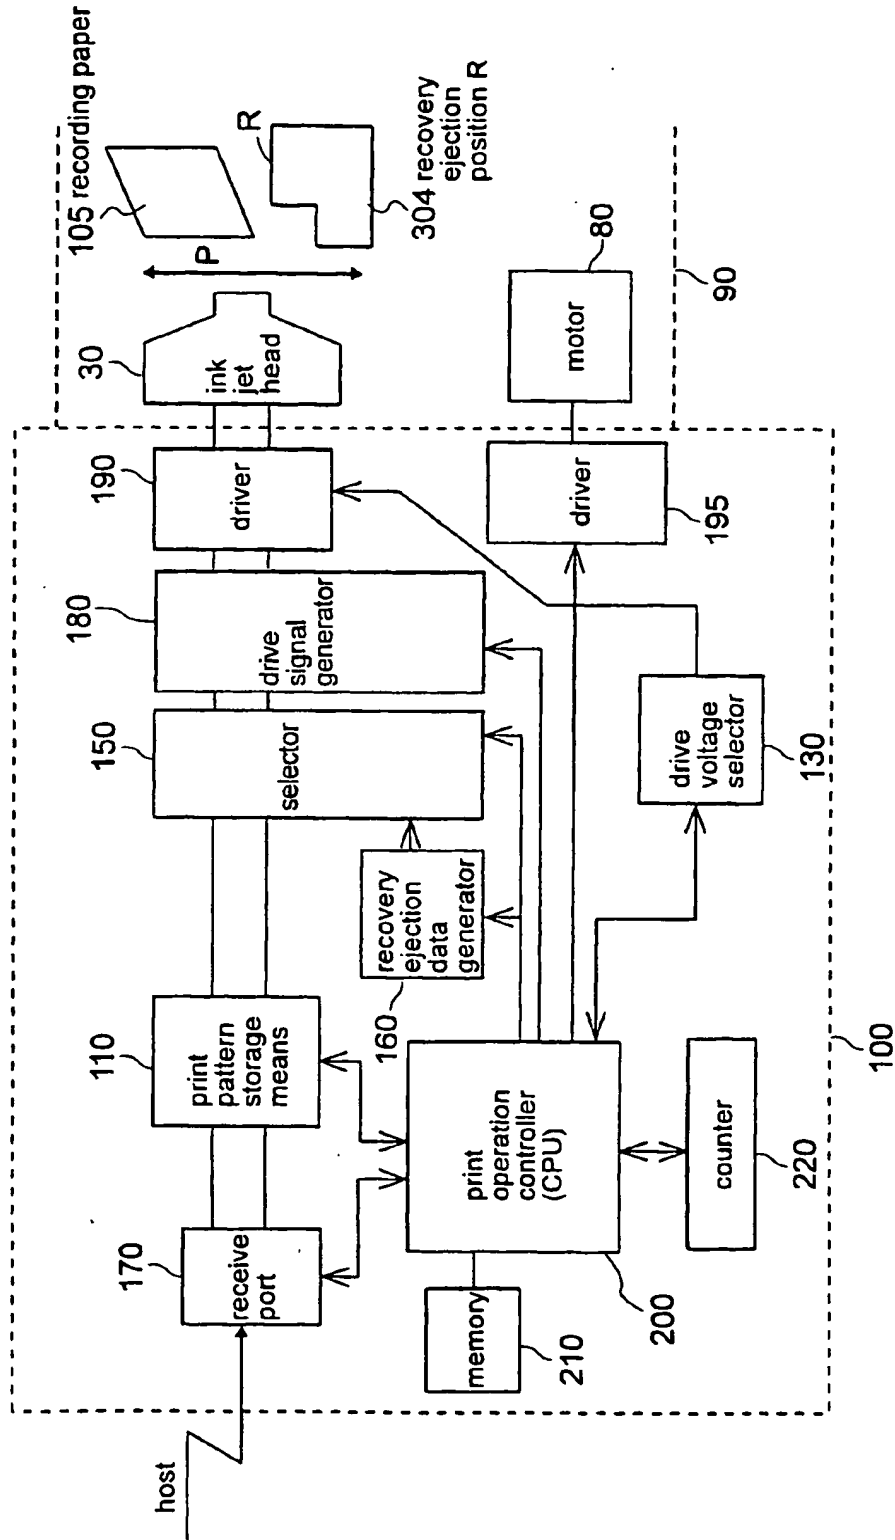


FIG. 1

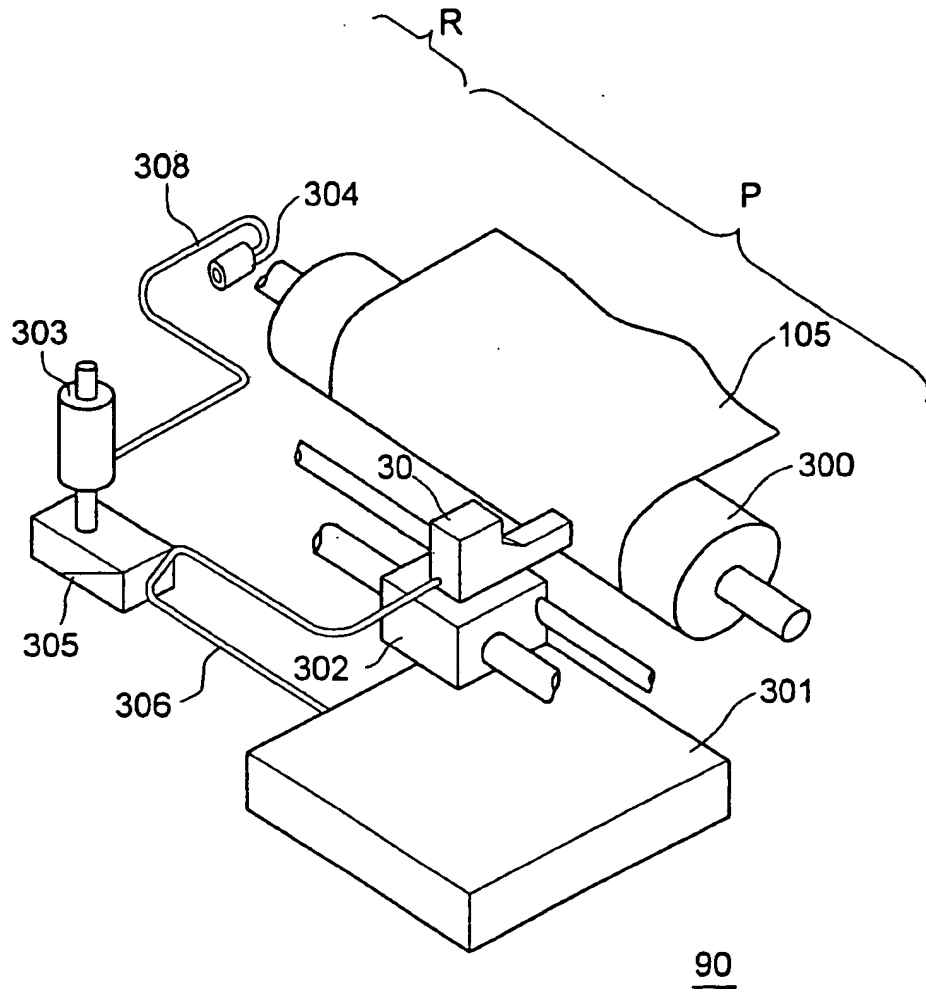
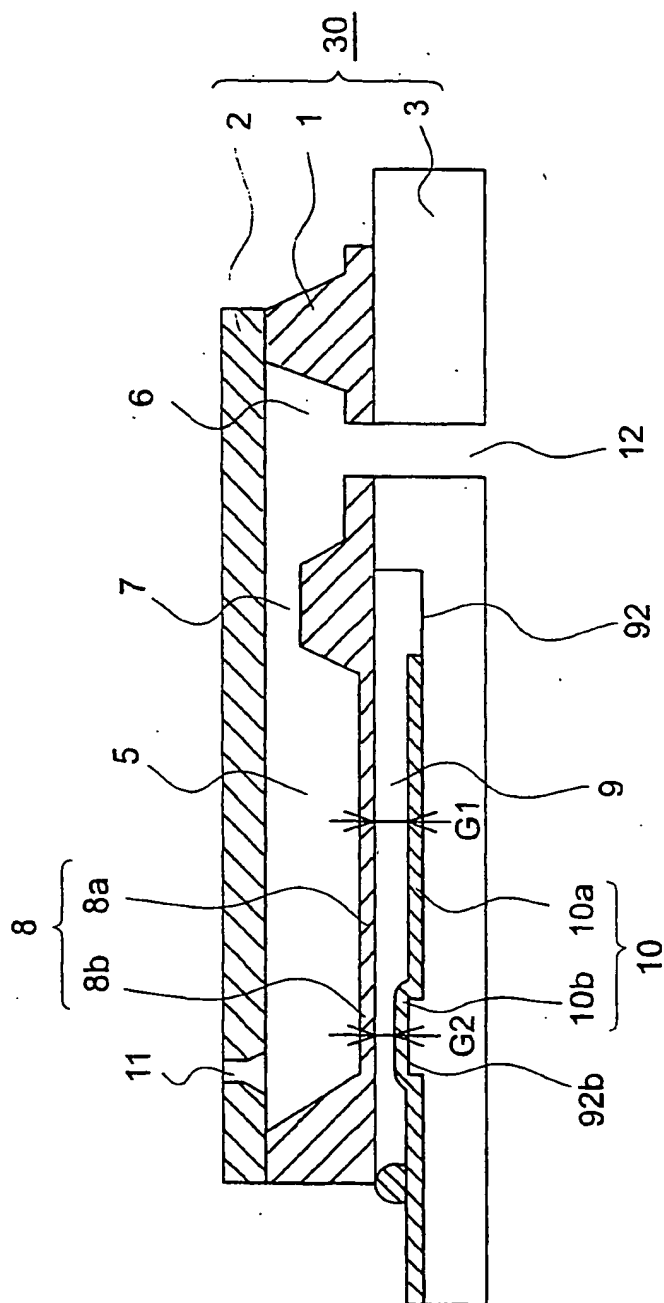


FIG. 2



**FIG. 3**

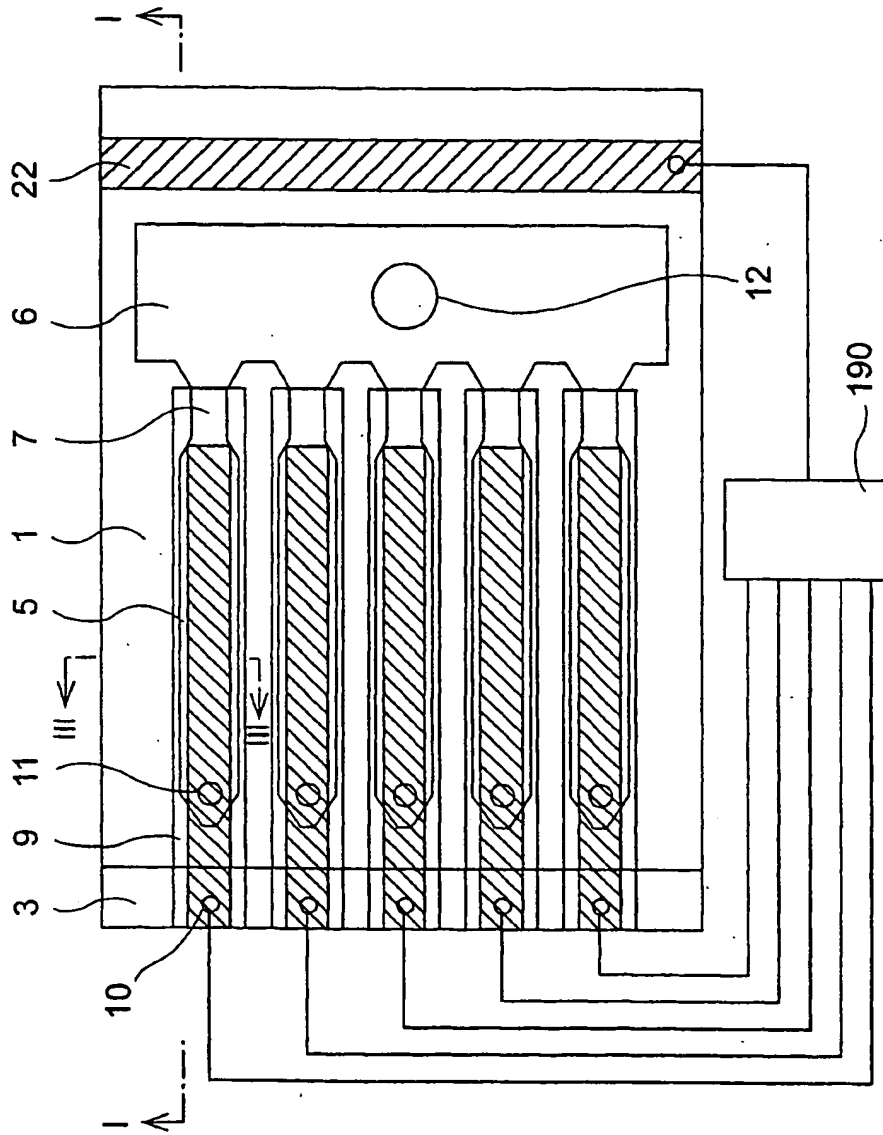
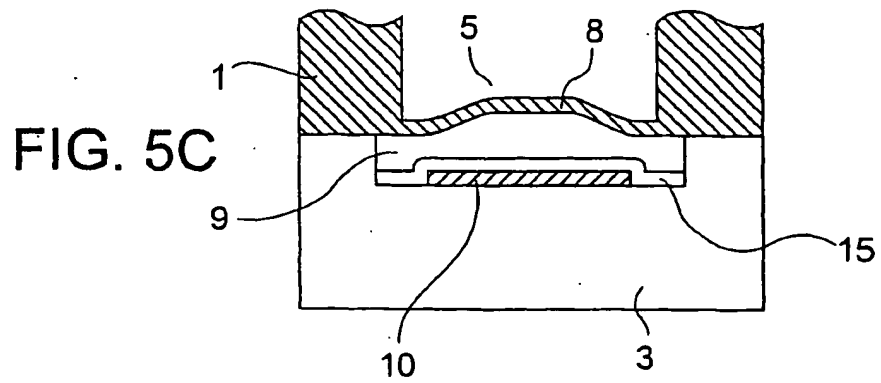
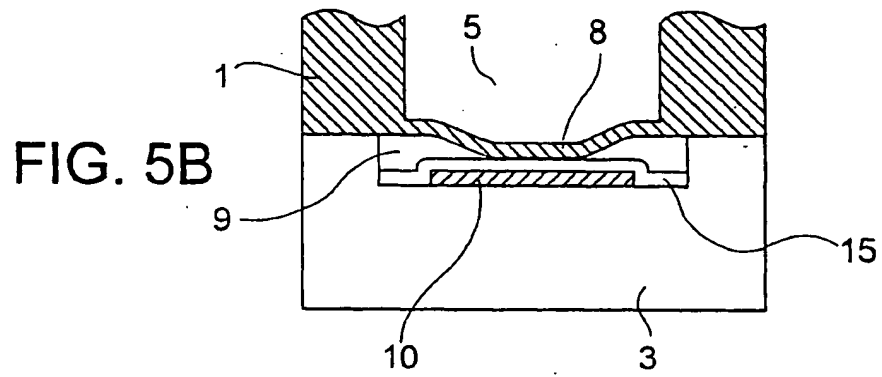
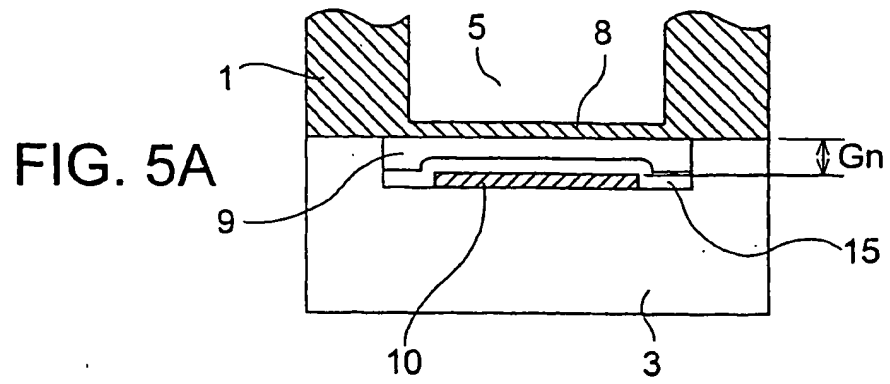


FIG. 4



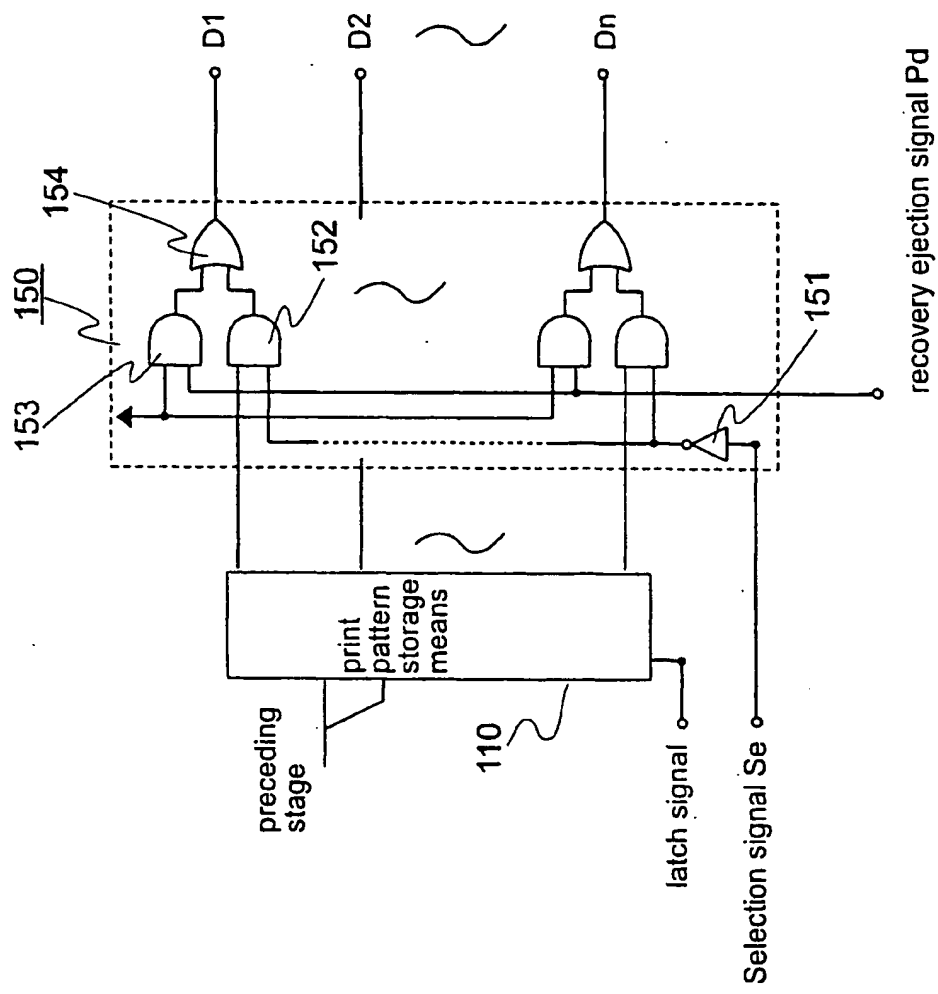


FIG. 6

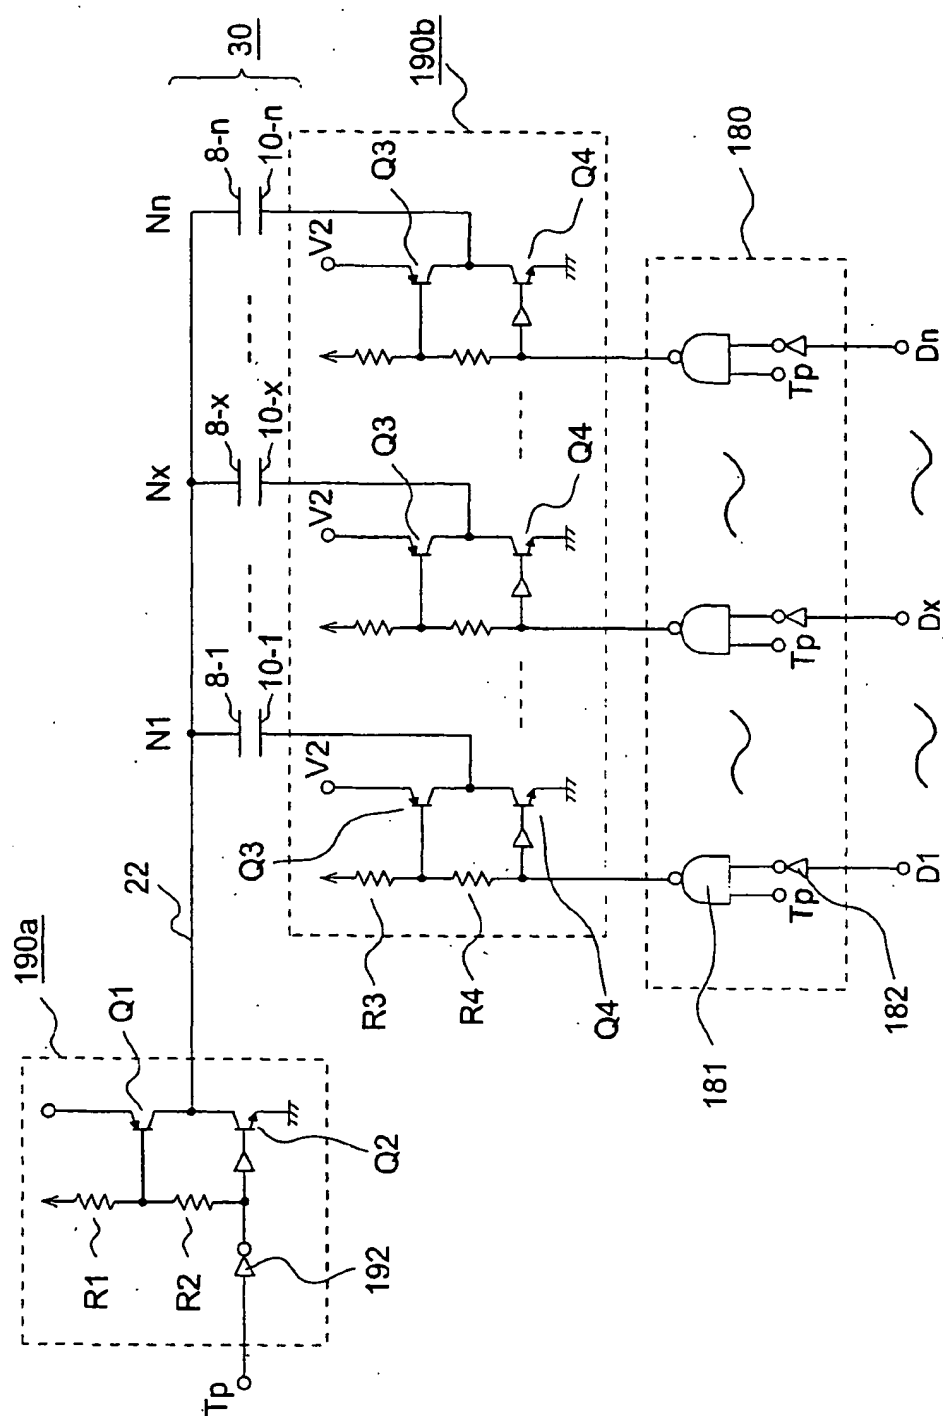


FIG. 7




State	[ 1 ]	[ 2 ]	[ 3 ]
timing pulse Tp	H	L	H
data signal Dx	H	H/L	L
common electrode terminal 22	V1	GND	V1
segment electrode 10x	GND	GND	V2
diaphragm displacement			

FIG. 8

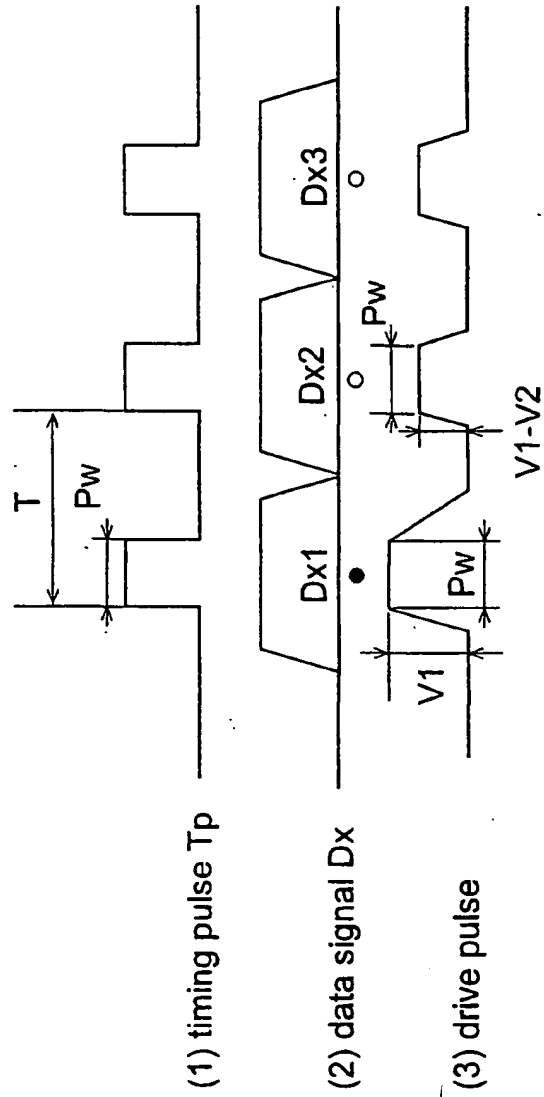


FIG. 9

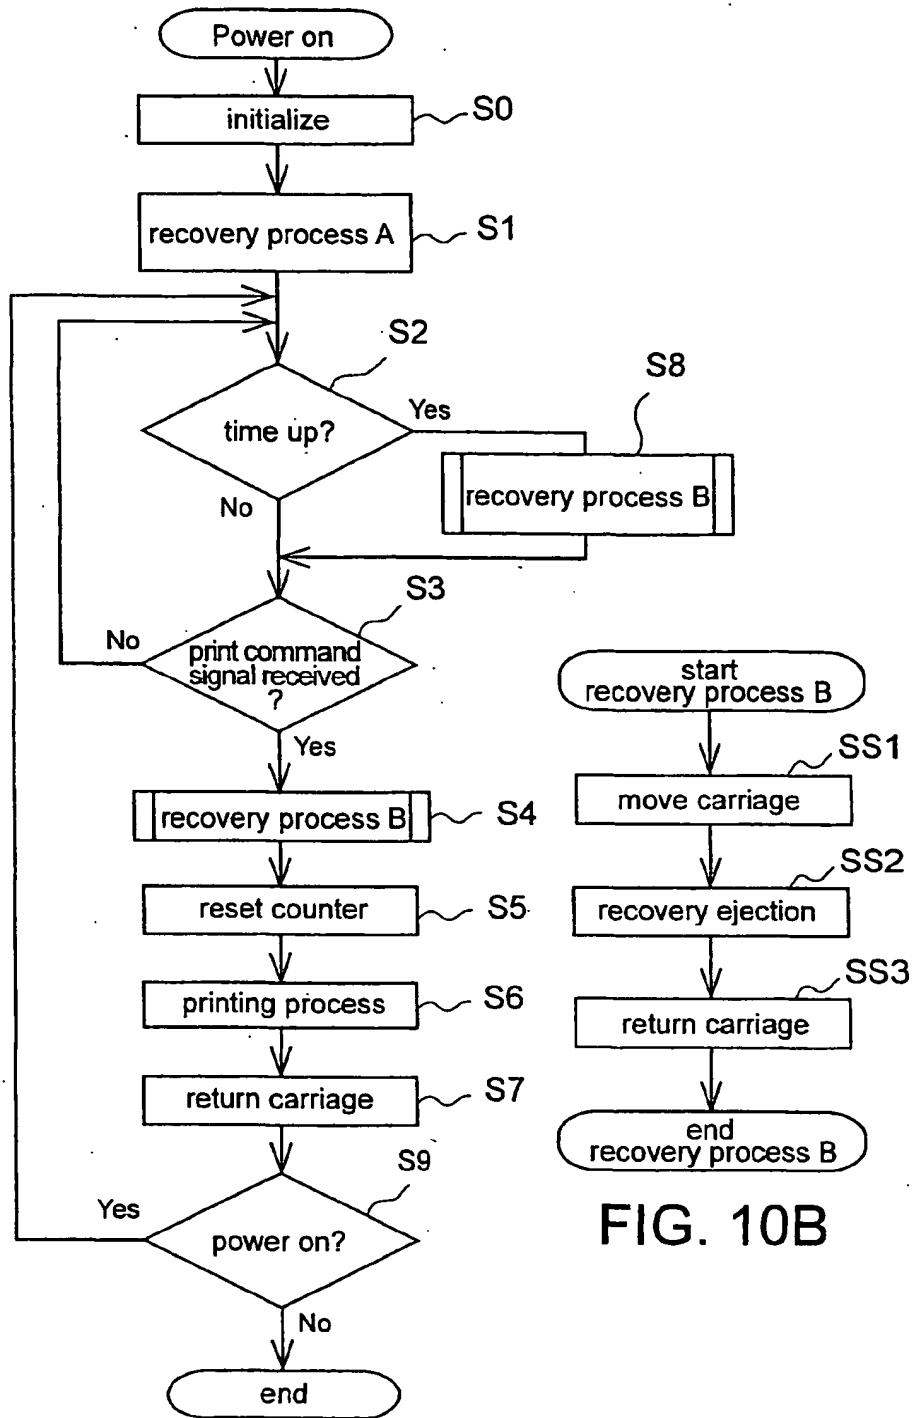


FIG. 10A

FIG. 10B

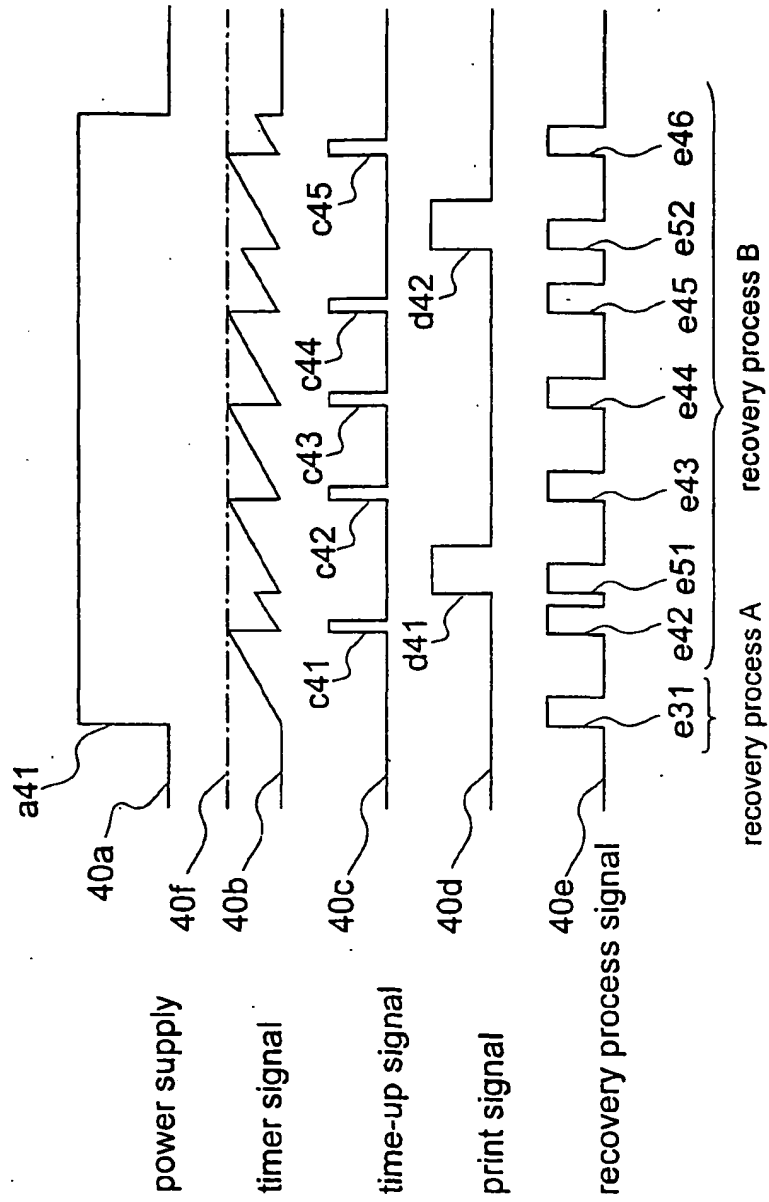


FIG. 11

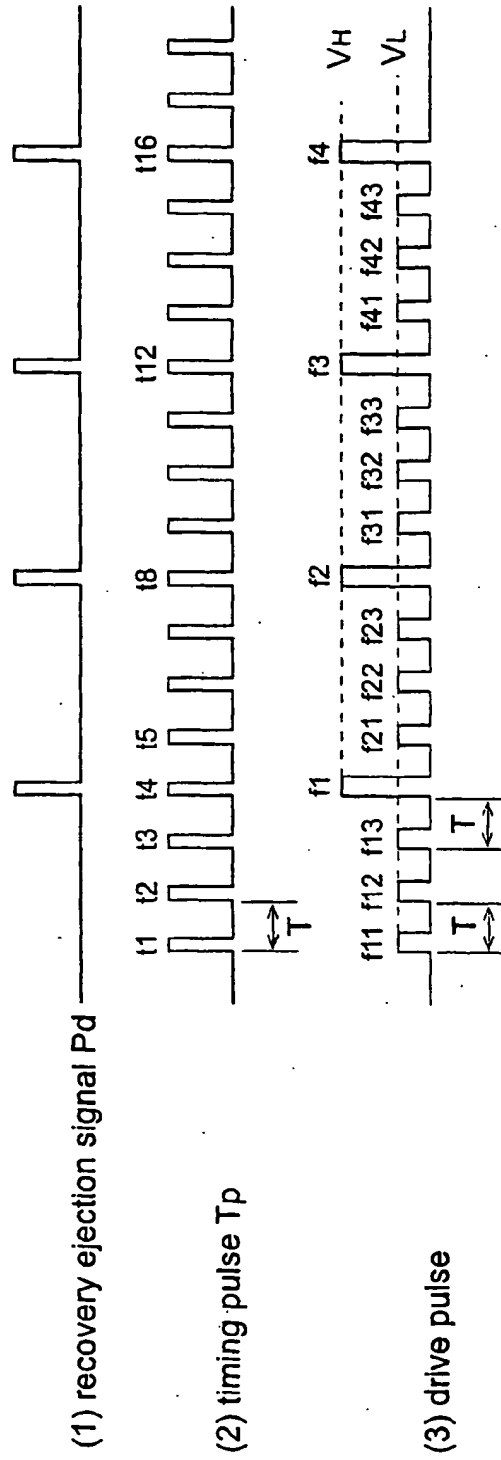


FIG. 12

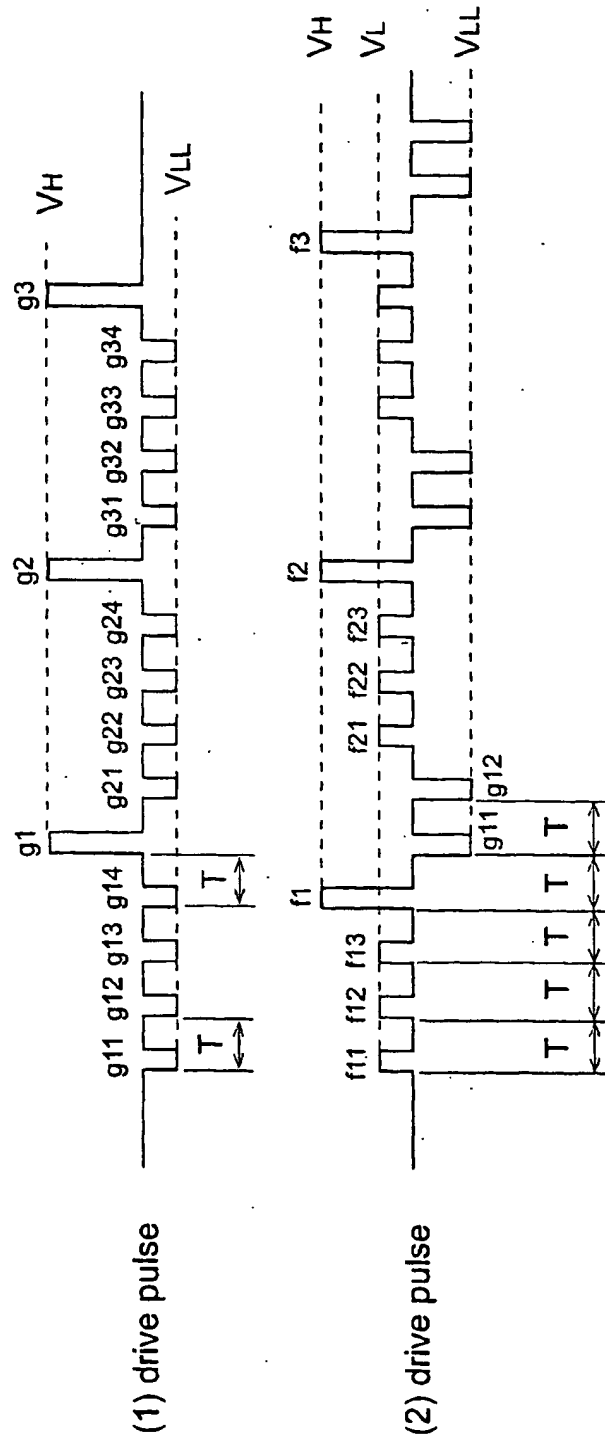


FIG. 13